



Y8A38A2-C2AB000XXX

SICK
Sensor Intelligence.



Ordering information

Type	Part no.
Y8A38A2-C2AB000XXX	2115735

Other models and accessories → www.sick.com/




Detailed technical data

Technical specifications


Accessory family	Junction boxes
Switching output	PNP
Shielding	Unshielded
Number of slots	8
Housing material	TPU
Housing color	Black
Slot connection type	M8, 3-pin, A-coded, female connector
Root port connection type	M12, 12-pin, A-coded, male connector
Width across flats	
	Slots 9
	Root port 13
Tightening torque	
	Slots 0.4 Nm
	Root port 0.6 Nm
Display LED	
	Slots 1 x per socket
	Root port 1x per distributor
Reference voltage	≤ 24 V DC
Operating voltage	18 V DC ... 30 V DC
Current loading	1.5 A, total at 30 °C (refer to correction factors EN 60204-1)
Overvoltage category	III
Ambient operating temperature	
	Distributor box -20 °C ... +55 °C
Enclosure rating	IP65/ IP67
UL File No.	E238799
Authorizations	UL CE
Items supplied	10 x labeling plates

Dimensional drawing (Dimensions in mm (inch))

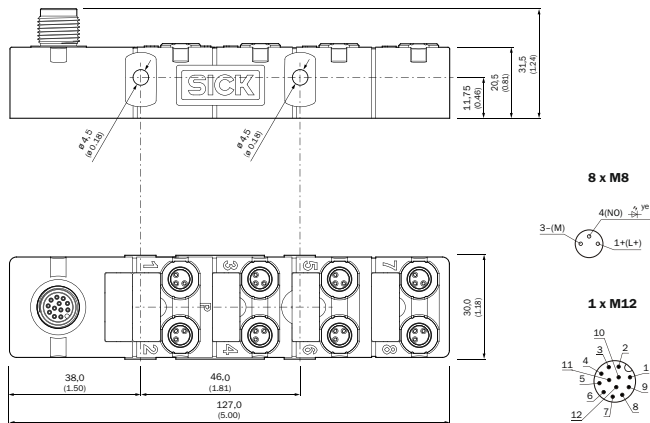




Anschlusschema

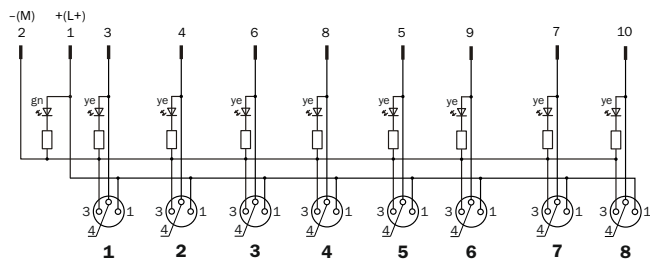

Cd-482



Recommended accessories

Other models and accessories → www.sick.com/

	Brief description	Type	Part no.
Device protection (mechanical)			
	1 piece, Protective cap for M8 socket or unused ports	DOS-08SK	5340762
Plug connectors and cables			
	Head A: female connector, M12, 12-pin, straight, A-coded Head B: Flying leads Cable: Sensor/actuator cable, PUR, halogen-free, unshielded, 5 m	YF2A1B-050UD1XLEAX	2119019
	Head A: female connector, M12, 12-pin, straight, A-coded Head B: Flying leads Cable: Sensor/actuator cable, PUR, halogen-free, unshielded, 10 m	YF2A1B-100UD1XLEAX	2119045
	Head A: female connector, M12, 12-pin, angled, A-coded Head B: Flying leads Cable: Sensor/actuator cable, PUR, halogen-free, unshielded, 5 m	YG2A1B-050UD1XLEAX	2119046

	Brief description	Type	Part no.
	Head A: female connector, M12, 12-pin, angled, A-coded Head B: Flying leads Cable: Sensor/actuator cable, PUR, halogen-free, unshielded, 10 m	YG2A1B-100UD1XLEAX	2119050
	Head A: female connector, M8, 3-pin, straight, A-coded Head B: male connector, M8, 3-pin, straight, A-coded Cable: Sensor/actuator cable, PUR, halogen-free, unshielded, 5 m	YF8U13-050UA1M8U13	2096308

SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is “Sensor Intelligence.”

WORLDWIDE PRESENCE:

Contacts and other locations –www.sick.com