

OD1000-6001R15

OD1000

DISPLACEMENT MEASUREMENT SENSORS

SICK
 Sensor Intelligence.



Ordering information

Type	Part no.
OD1000-6001R15	1075638

Other models and accessories → www.sick.com/OD1000



Detailed technical data

Mechanics/electronics

Supply voltage V_s	DC 18 V ... 30 V ¹⁾
Ripple	$\leq 5 V_{pp}$ ²⁾
Power consumption	$\leq 2.5 W$ ³⁾
Warm-up time	< 10 min
Housing material	Metal (zinc diecast)
Window material	Plastic (PMMA)
Connection type	Cable with male connector, M12, 5-pin, A-coded, 20 cm
Indication	OLED display, status LEDs
Control elements	4 buttons
Weight	280 g
Dimensions (W x H x D)	25.9 mm x 71.5 mm x 53.2 mm
Enclosure rating	IP65 IP67
Protection class	III (EN 50178)

¹⁾ Limit values, reverse-polarity protected, operation in short-circuit protected network: max. 8 A.

²⁾ May not fall short of or exceed V_s tolerances.

³⁾ Without load, at +20 °C.

Performance

Measuring range	200 mm ... 1,000 mm ¹⁾
Target	Natural objects
Repeatability	0.4 mm ^{2) 3)}
Linearity	± 1.5 mm ^{2) 4)}
Response time	≥ 1.5 ms ⁵⁾
Measuring frequency	≤ 3 kHz
Output time	≥ 0.33 ms
Light source	Laser, red visible red light
Laser class	1 (IEC 60825-1:2014, EN 60825-1:2014) ⁶⁾
Typ. light spot size (distance)	1.5 mm x 1.5 mm (200 mm ... 1,000 mm)
Additional function	Adjustable average value or media filter, Switching mode: Distance to Object (DtO) / switching window / object between sensor and background (ObSB), teach-in of digital output, invertable digital output, teach-in of analog output, Invertable analog output, Switchable analog output (mA / V), Multifunctional input: laser off / external teach-in / deactivated, switch-off display, lock user interface, Display can be rotated by 180°, Alarm function, Edge height jump, Time functions (ON/OFF delay, 1 shot)

¹⁾ 6 % ... 90 % remission; at default settings.

²⁾ With 90% remission (white), with constant ambient conditions.

³⁾ Statistical error 3 σ.

⁴⁾ Observe min. warm-up time of 10 minutes.

⁵⁾ With measuring frequency of 3 kHz, target change white 90%/white 90%.

⁶⁾ Wavelength 655 nm, max. pulse output 0.78 mW, max. average power 0.39 mW, max. pulse duration 1.8 ms.

Interfaces

IO-Link	✓, IO-Link V1.1, IO-Link V1.0
Function	Process data, parameterization, diagnosis, data storage
Data transmission rate	230,4 kbit/s (COM3) / 38,4 kbit/s (COM2)
Digital input	In ₁ Can be used as laser off, external teach-in, or deactivated
Digital output	Number 2 ¹⁾ Type Push-pull: PNP/NPN
Analog output	Number 1 Type Current output / voltage output Current 4 mA ... 20 mA, ≤ 600 Ω Voltage 0 V ... 10 V, > 20,000 Ω Resolution 16 bit

¹⁾ PNP: HIGH = U_V - (< 3 V) / LOW = < 3 V; NPN: HIGH = < 3 V / LOW = U_V.

Ambient data

Ambient temperature, operation	-10 °C ... +50 °C, Operating temperature at V _S = 24 V
Ambient temperature, storage	-20 °C ... +60 °C

¹⁾ With constant object movement in the measuring range.


Temperature drift	0.15 mm/K
Typ. Ambient light immunity	Artificial light: ≤ 3,000 lx ¹⁾ Sunlight: ≤ 10,000 lx
Vibration resistance	EN 60068-2-6, EN 60068-2-64
Shock resistance	EN 60068-2-27

¹⁾ With constant object movement in the measuring range.

Classifications


eCl@ss 5.0	27270801
eCl@ss 5.1.4	27270801
eCl@ss 6.0	27270801
eCl@ss 6.2	27270801
eCl@ss 7.0	27270801
eCl@ss 8.0	27270801
eCl@ss 8.1	27270801
eCl@ss 9.0	27270801
eCl@ss 10.0	27270801
eCl@ss 11.0	27270801
eCl@ss 12.0	27270916
ETIM 5.0	EC001825
ETIM 6.0	EC001825
ETIM 7.0	EC001825
ETIM 8.0	EC001825
UNSPSC 16.0901	411111613

Dimensional drawing (Dimensions in mm (inch))

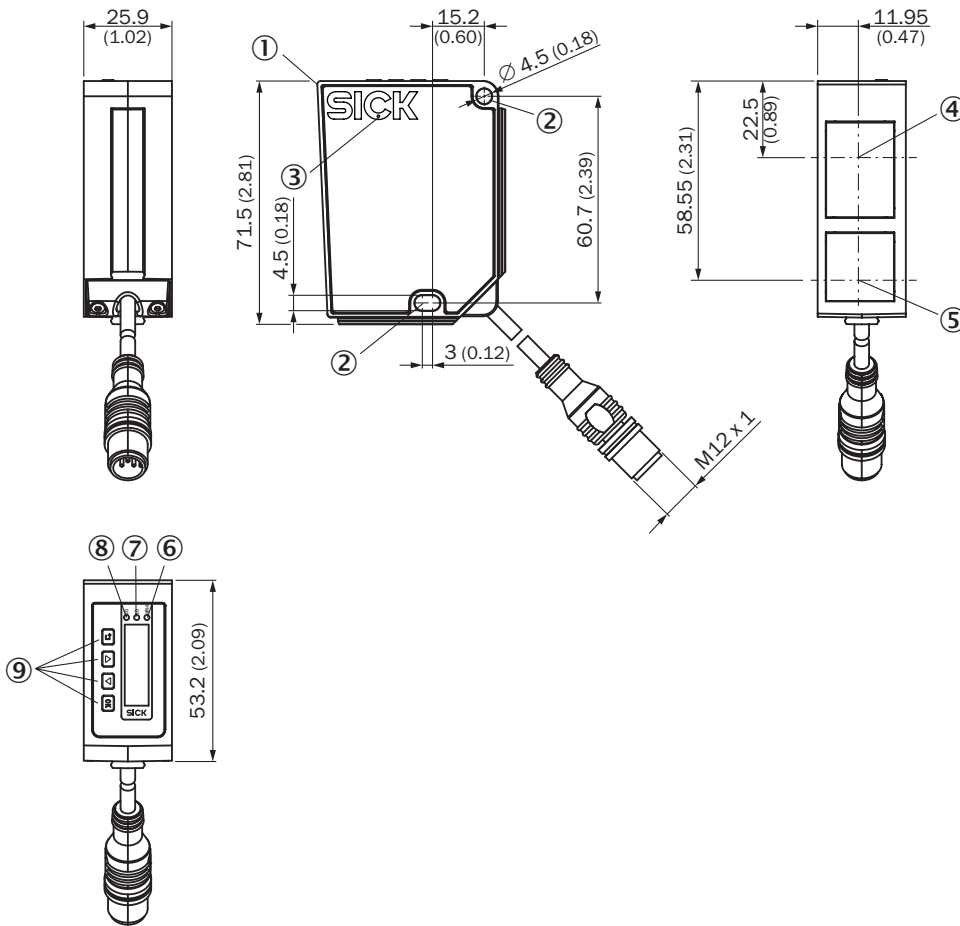


- ① Zero level
- ② Mounting hole M4
- ③ Ventilation opening (do not cover)
- ④ Center of optical axis, receiver
- ⑤ Center of optical axis, sender
- ⑥ PWR LED green
- ⑦ LED Q1, yellow
- ⑧ LED Q2, yellow
- ⑨ Control elements

Connection diagram



PIN assignment


Connector M12, 5-pin, A-coded



- ① L+
- ② QA/Q2/Q̄1
- ③ M
- ④ Q₁/C
- ⑤ In₁

Linearity

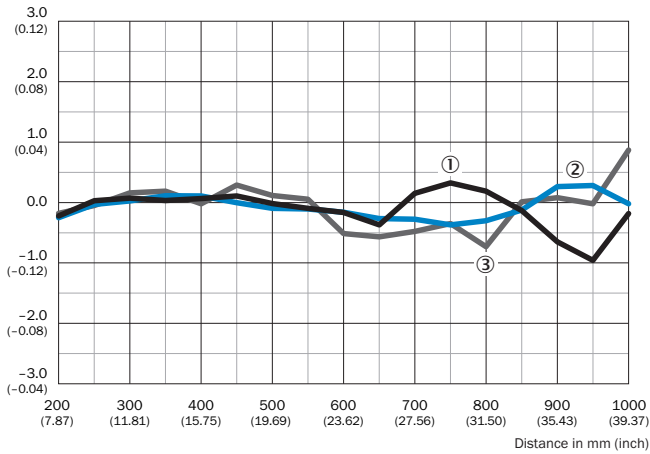

Typical linearity deviation in mm (inch)




- ① Black 6 % remission
- ② White 90 % remission
- ③ Stainless steel

Recommended accessories

Other models and accessories → www.sick.com/OD1000

	Brief description	Type	Part no.
Connection modules			
	IO-Link V1.1 Class A port, USB2.0 port, optional external power supply 24V / 1A	IOLA2US-01101 (SiLink2 Master)	1061790
Mounting brackets and plates			
	Stainless-steel mounting bracket, stainless steel	BEF-WN-OD1000	4089813

	Brief description	Type	Part no.
Plug connectors and cables			
	Head A: female connector, M12, 5-pin, straight, A-coded Head B: Flying leads Cable: Sensor/actuator cable, PVC, unshielded, 2 m	YF2A15-020VB5XLEAX	2096239

Recommended services

Additional services → www.sick.com/OD1000

	Type	Part no.
Warranty extensions		
<ul style="list-style-type: none"> • Product area: Identification solutions, machine vision, Distance sensors, Detection and ranging solutions • Range of services: The services correspond to the scope of the statutory manufacturer warranty (SICK general terms and conditions of purchase) • Duration: Five-year warranty from delivery date. 	Extended warranty for a total of five years from delivery date	1680671
Commissioning		
<ul style="list-style-type: none"> • Product area: Displacement measurement sensors • Range of services: Inspection of connection and mounting, optimization of parameters of SICK product as well as tests, set-up of previously defined functions of the scaling of the analog measuring range, switching point position, hysteresis, measuring frequency, measured value filter, signal quality, evaluation function, or communication interface • Travel expenses: The prices do not include travel costs such as hotel, flight, travel time and expenses. • Duration: Additional work will be invoiced separately 	DT20 Hi/OD/OL commissioning	1612241

SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is “Sensor Intelligence.”

WORLDWIDE PRESENCE:

Contacts and other locations –www.sick.com