



# WS/WE12L-2N430

W12-2 Laser

SMALL PHOTOELECTRIC SENSORS

**SICK**  
Sensor Intelligence.



Illustration may differ



### Ordering information

| Type           | Part no. |
|----------------|----------|
| WS/WE12L-2N430 | 1018255  |

**Included in delivery:** BEF-KH-W12 (2)

Other models and accessories → [www.sick.com/W12-2\\_Laser](http://www.sick.com/W12-2_Laser)

### Detailed technical data

#### Features

|   |   |
|---|---|
| <b>Device type</b>                          | Photoelectric sensors   |
| <b>Functional principle</b>                 | Through-beam photoelectric sensor                                   |
| <b>Sensing range max.</b>                   | 0 m ... 80 m  |
| <b>Emitted beam</b>                         |   |
| Light source                                | Laser <sup>1)</sup>   |
| Type of light                               | Visible red light   |
| Light spot size (distance)                  | Ø 150 mm (60 m)   |
| <b>Key laser figures</b>                    |   |
| Normative reference                         | EN 60825-1:2014, IEC 60825-1:2007                                   |
| Laser class                                 | 2 <sup>2)</sup>   |
| <b>Key LED figures</b>                      |   |
| Wave length                                 | 650 nm  |
| <b>Adjustment</b>                           | None  |
| <b>Special applications</b>                 | Detecting small objects, Detection of objects moving at high speeds |
| <b>Items supplied</b>                       | 2 x clamps BEF-KH-W12, incl. screws                                 |
| <b>Part number of individual components</b> | 2021722 WS12L-2D430 2021725 WE12L-2N430                             |

<sup>1)</sup> Average service life: 50,000 h at T<sub>U</sub> = +25 °C.

<sup>2)</sup> Pulse length 4 µs, max. pulse power < 5,0 mW.

#### Safety-related parameters

|                                     |           |
|-------------------------------------|-----------|
| <b>MTTF<sub>D</sub></b>             | 308 years |
| <b>DC<sub>avg</sub></b>             | 0 %       |
| <b>T<sub>M</sub> (mission time)</b> | 10 years  |

## Electrical data

|  |   |
|--|---|
| <b>Supply voltage <math>U_B</math></b> | 10 V DC ... 30 V DC <sup>1)</sup>                                       |
| <b>Ripple</b>                          | $< 5 V_{pp}$ <sup>2)</sup>  |
| <b>Current consumption, sender</b>     | $\leq 45 \text{ mA}$ <sup>3)</sup>                                      |
| <b>Current consumption, receiver</b>   | $\leq 15 \text{ mA}$ <sup>3)</sup>                                      |
| <b>Protection class</b>                | III   |
| <b>Digital output</b>                  |   |
| Type                                   | NPN   |
| Signal voltage PNP HIGH/LOW            | $U_v - < 2.9 \text{ V}, U_v \text{ V} / 0 \text{ V} \leq 1.5 \text{ V}$ |
| Signal voltage NPN HIGH/LOW            | $U_v - < 2.9 \text{ V}, U_v \text{ V} / 0 \text{ V} \leq 1.5 \text{ V}$ |
| Output current $I_{max}$               | $\leq 100 \text{ mA}$   |
| Response time                          | $\leq 200 \mu\text{s}$ <sup>4)</sup>                                    |
| Switching frequency                    | 2,500 Hz <sup>5)</sup>  |
| <b>Switching mode selector</b>         | Selectable via L/D control cable  |
| <b>Circuit protection</b>              | A <sup>6)</sup><br>C <sup>7)</sup><br>D <sup>8)</sup>                   |

1) Limit values when operated in short-circuit protected network: max. 8 A.

2) May not exceed or fall below  $U_v$  tolerances.

3) Without load.

4) Signal transit time with resistive load.

5) With light/dark ratio 1:1.

6) A =  $V_S$  connections reverse-polarity protected.

7) C = interference suppression.

8) D = outputs overcurrent and short-circuit protected.

## Mechanical data

|                               |                           |
|-------------------------------|---------------------------|
| <b>Housing</b>                | Rectangular               |
| <b>Dimensions (W x H x D)</b> | 15 mm x 49 mm x 41.5 mm   |
| <b>Connection</b>             | Male connector M12, 4-pin |
| <b>Material</b>               |                           |
| Housing                       | Metal                     |
| Front screen                  | Plastic, PMMA             |
| <b>Weight</b>                 | 260 g                     |

## Ambient data


|                                      |                              |
|--------------------------------------|------------------------------|
| <b>Enclosure rating</b>              | IP67<br>IP69K                |
| <b>Ambient operating temperature</b> | -10 °C ... +50 °C            |
| <b>Ambient temperature, storage</b>  | -25 °C ... +75 °C            |
| <b>UL File No.</b>                   | NRKH.E181493 & NRKH7.E181493 |

## Classifications

|                     |          |
|---------------------|----------|
| <b>eCl@ss 5.0</b>   | 27270901 |
| <b>eCl@ss 5.1.4</b> | 27270901 |
| <b>eCl@ss 6.0</b>   | 27270901 |


|                       |          |
|-----------------------|----------|
| <b>eCl@ss 6.2</b>     | 27270901 |
| <b>eCl@ss 7.0</b>     | 27270901 |
| <b>eCl@ss 8.0</b>     | 27270901 |
| <b>eCl@ss 8.1</b>     | 27270901 |
| <b>eCl@ss 9.0</b>     | 27270901 |
| <b>eCl@ss 10.0</b>    | 27270901 |
| <b>eCl@ss 11.0</b>    | 27270901 |
| <b>eCl@ss 12.0</b>    | 27270901 |
| <b>ETIM 5.0</b>       | EC002716 |
| <b>ETIM 6.0</b>       | EC002716 |
| <b>ETIM 7.0</b>       | EC002716 |
| <b>ETIM 8.0</b>       | EC002716 |
| <b>UNSPSC 16.0901</b> | 39121528 |

### Connection type




### Connection diagram

Cd-077

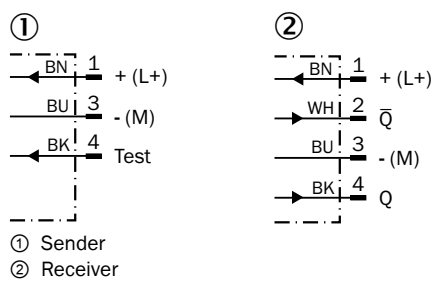


### Characteristic curve

WS/WE12L-2, 80 m

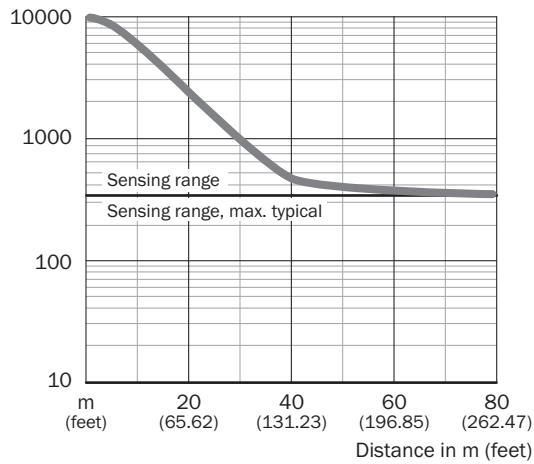

### Sensing range diagram


WS/WE12L-2, 80 m

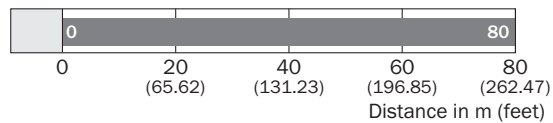


■ Sensing range/sensing range typ. max.

### Adjustments

WS/WE12L-2

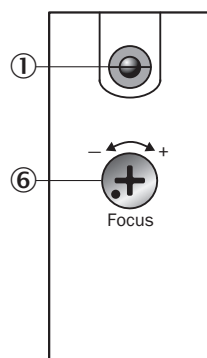


- ① Status indicator (WS, top only)
- ⑥ Focal adjustment (WS)

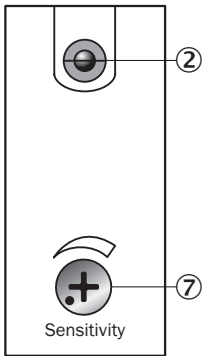

- ② LED signal strength indicator (WE)
- ⑦ Sensitivity adjustment (WE)

### Dimensional drawing (Dimensions in mm (inch))

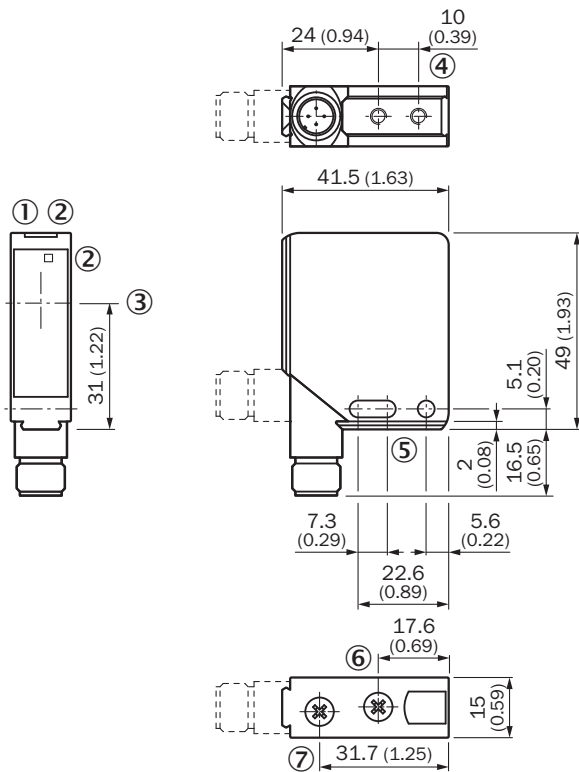

WL12L-2, WS/WE12L-2



- ① Operating indicator, green
- ② LED reception indicator, yellow
- ③ Center of optical axis
- ④ M4 threaded mounting hole – 4 mm depth
- ⑤ Mounting hole, Ø 4.2 mm
- ⑥ Focal adjustment
- ⑦ Sensitivity control

**Recommended accessories**

Other models and accessories → [www.sick.com/W12-2\\_Laser](http://www.sick.com/W12-2_Laser)

|   | <b>Brief description</b>  | <b>Type</b>        | <b>Part no.</b> |
|---|---|--------------------|-----------------|
| <b>Plug connectors and cables</b>   |   |                    |                 |
|  | Head A: female connector, M12, 4-pin, straight, A-coded<br>Head B: Flying leads<br>Cable: Sensor/actuator cable, PVC, unshielded, 5 m | YF2A14-050VB3XLEAX | 2096235         |
|  | Head A: male connector, M12, 4-pin, straight<br>Cable: unshielded   | STE-1204-G         | 6009932         |

## SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is “Sensor Intelligence.”

## WORLDWIDE PRESENCE:

Contacts and other locations –[www.sick.com](http://www.sick.com)