



SIG350-0006AP100

SIG350

SENSOR INTEGRATION GATEWAY

SICK
Sensor Intelligence.



Ordering information

| Type | Part no. |
|------------------|----------|
| SIG350-0006AP100 | 6076924 |

Other models and accessories → www.sick.com/SIG350



Detailed technical data

Features

| | |
|---------------------------|---|
| Product category | IO-Link Master |
| Supported products | IO-Link Devices Binary switching sensors Binary actuators |
| Further functions | Web server integrated IIoT interface available (dual talk) |
| Items supplied | SIG350-0006AP100, Marking labels, quickstart |

Mechanics/electronics

| | | |
|---|---|--|
| Connections | | |
| | IO-Link | 8 x M12, 5-pin female connector, A-coded |
| | Power | 1 x M12, 5-pin male connector, L-coded 1 x M12, 5-pin female connector, L-coded |
| | Ethernet | 2 x M12, 4-pin female connector, D-coded |
| Power voltage supply | | |
| | Supply voltage | 18 V DC ... 30 V DC ¹⁾ |
| | Current carrying capacity (PWR1, PWR2) max. | ≤ 16 A, U _S ²⁾ ≤ 16 A, U _A ²⁾ |
| Current consumption | | ≤ 180 mA ³⁾ |
| Voltage supply U_S (sensors) | | |
| | Total current (S1 ... S8) | ≤ 10 A ²⁾ |
| | Voltage supply (pin 1) | 2 A |

¹⁾ Each for U_S and U_A, typ. supply voltage 24 V DC.

²⁾ ≤ +40 °C (see "Derating" information in operating instructions).

³⁾ Without load, sensors and outputs switched off.

⁴⁾ When using a SELV or PELV power supply unit.

| | |
|---|---|
| Output current (DO) (pin 2 + pin 4) | 2 A |
| Current carrying capacity per port max. | 4 A |
| Voltage supply U_A (actuators) | |
| Total current (S1 ... S8) | ≤ 10 A ²⁾ |
| Voltage supply (pin 2) | 2 A |
| Current carrying capacity per port max. | 4 A |
| Digital inputs | |
| Number | 16, configurable |
| Input characteristics | EN 61131-2 type 1 and type 3 |
| Type | PNP |
| Filter time | 0 ms ... 15 ms |
| Delay time at signal change | 2 ms ... 5 ms |
| Circuit protection | Short-circuit protected (MOSFET with current measurement) |
| Digital outputs | |
| Number | 16, configurable |
| Type | PNP |
| Switching frequency | ≤ 50 Hz |
| Circuit protection | Short-circuit protected (MOSFET with current measurement) |
| Optical indicators | |
| | 8 LED green/yellow/red (Communication pin 4) |
| | 8 LED yellow/red (Communication pin 2) |
| | 1 LED green/red (device status) |
| | 1 LED green/yellow (Network status) |
| | 1 LED green (PLC operational status) |
| | 1 LED red (PLC configuration) |
| | 3 LED green (PLC communication) |
| | 2 LED green/red (power supply) |
| Enclosure rating | IP67 (In fastened condition) |
| Protection class | III ⁴⁾ |
| Contamination rating | 2 |
| Housing material | Plastic (Valox 553) |
| Housing color | Dark gray |
| Weight | 486 g |
| Dimensions (L x W x H) | 225 mm x 63 mm x 37.4 mm |
| UL File No. | E238799 |

¹⁾ Each for U_S and U_A, typ. supply voltage 24 V DC.

²⁾ ≤ +40 °C (see "Derating" information in operating instructions).

³⁾ Without load, sensors and outputs switched off.

⁴⁾ When using a SELV or PELV power supply unit.

Communication interface

| | |
|------------------------|-------------------|
| IO-Link | ✓, V1.1 |
| Number of ports | 8 |
| Port Class | A/B ¹⁾ |
| Data transmission rate | COM1, COM2, COM3 |
| Additional features | Data Storage |

¹⁾ Freely configurable per port, no galvanic separation between U_S and U_A.

| | |
|----------------------------|--|
| Ethernet | ✓ |
| EtherCAT | ✓ |
| Number of ports | 2 |
| Data transmission rate | 10/100 MBit/s |
| Cycle time | ≥ 250 µs |
| Addressing | Auto-increment, fixed addressing (rotary switch: static EtherCAT address (0-99)) |
| Factory setting | Static IP address 0.0.0.0, DHCP client not activated |
| REST API | ✓ |
| Specification | JSON integration for IO-Link version (V1.0.0) |
| MQTT | ✓ |
| Specification | JSON integration for IO-Link version (V1.0.0) |
| OPC UA | ✓ |
| Specification | IO-Link Companion Specification Version (V1.0) |
| Operator interfaces | Integrated web server (a suitable EtherCAT PLC is required to activate the web server) |

¹⁾ Freely configurable per port, no galvanic separation between U_S and U_A.

Ambient data


| | |
|--|--|
| Ambient operating temperature | -25 °C ... +70 °C ¹⁾ |
| Ambient temperature, storage | -40 °C ... +80 °C ¹⁾ |
| Electromagnetic compatibility (EMC) | EN 61000-6-2:2016 EN 61000-6-4:2020 |
| Shock load | EN 60068-2-27 |

¹⁾ Permissible relative humidity 0% ... 95% (non-condensing).

Classifications

| | |
|-----------------------|----------|
| eCl@ss 5.0 | 27242208 |
| eCl@ss 5.1.4 | 27242608 |
| eCl@ss 6.0 | 27242608 |
| eCl@ss 6.2 | 27242608 |
| eCl@ss 7.0 | 27242608 |
| eCl@ss 8.0 | 27242608 |
| eCl@ss 8.1 | 27242608 |
| eCl@ss 9.0 | 27242608 |
| eCl@ss 10.0 | 27242608 |
| eCl@ss 11.0 | 27242608 |
| eCl@ss 12.0 | 27242608 |
| ETIM 5.0 | EC001604 |
| ETIM 6.0 | EC001604 |
| ETIM 7.0 | EC001604 |
| ETIM 8.0 | EC001604 |
| UNSPSC 16.0901 | 32151705 |


Dimensional drawing (Dimensions in mm (inch))

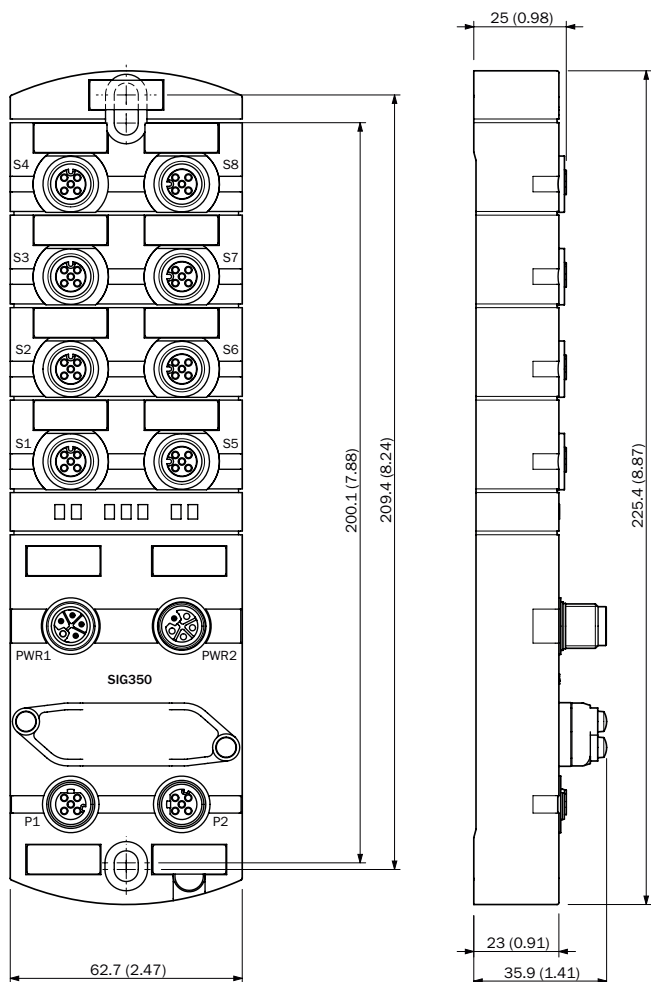

Connection diagram


Cd-535

Power PWR1




| | |
|----|-------------------------|
| BN | 1 + (L+) U _s |
| WH | 2 - (M) |
| BU | 3 - (M) |
| BK | 4 + (L+) U _A |
| GY | 5 FE ⚡ |

Power PWR2




| | |
|----|-------------------------|
| BN | 1 + (L+) U _s |
| WH | 2 - (M) |
| BU | 3 - (M) |
| BK | 4 + (L+) U _A |
| GY | 5 FE ⚡ |

Ports P1 / P2




| | |
|----|-----------------|
| YE | 1 Tx + |
| WH | 2 Rx + |
| OG | 3 Tx - |
| BU | 4 Rx - |
| | 5 not connected |

S1 ... S8





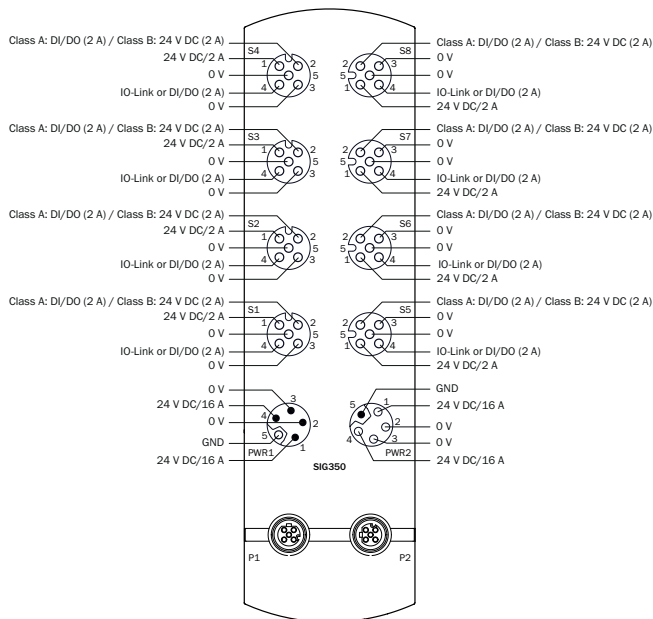



| | |
|----|--------------------|
| BN | 1 + (L+) |
| WH | 2 DI/DO |
| BU | 3 - (M) |
| BK | 4 IO-Link or DI/DO |
| GY | 5 - (M) |



PIN assignment



Recommended accessories

Other models and accessories → www.sick.com/SIG350

| | Brief description | Type | Part no. |
|---|--|--------------------|----------|
| Device protection (mechanical) | | | |
|  | 10 pieces, Protective cap for M12 socket or unused ports | DOS-12SK | 5309189 |
| Distributors | | | |
|  | Head A: male connector, M12, 5-pin, A-coded Head B: female connector, M12, 4-pin, A-coded Cable: Sensor/actuator cable | YM2A15-000S01FY2A4 | 2099600 |
| Plug connectors and cables | | | |
|  | Head A: female connector, M12, 5-pin, straight, L-coded Head B: Flying leads Cable: Sensor/actuator cable, PUR, halogen-free, unshielded, 5 m | YF2L15-050UH1XLEAX | 2099626 |
|  | Head A: female connector, M12, 4-pin, straight, A-coded Head B: male connector, M12, 4-pin, straight, A-coded Cable: Sensor/actuator cable, PUR, halogen-free, unshielded, 1 m | YF2A14-010UB3M2A14 | 2095997 |
|  | Head A: female connector, M12, 4-pin, straight, A-coded Head B: male connector, M12, 4-pin, straight, A-coded Cable: Sensor/actuator cable, PUR, halogen-free, unshielded, 5 m | YF2A14-050UB3M2A14 | 2096001 |
|  | Head A: female connector, M12, 5-pin, straight, L-coded Head B: male connector, M12, 5-pin, straight, L-coded Cable: Sensor/actuator cable, PUR, halogen-free, unshielded, 1 m | YF2L15-010UK1M2L15 | 2125147 |

| | Brief description | Type | Part no. |
|---|---|--------------------|----------|
|  | Head A: male connector, M12, 4-pin, straight, D-coded Head B: male connector, RJ45, 4-pin, straight Cable: Ethernet, EtherNet/IP™, TPE, shielded, 1 m | YM2D24-010EF4MRJA4 | 2112844 |
|  | Head A: male connector, M12, 4-pin, straight, D-coded Head B: male connector, RJ45, 4-pin, straight Cable: Ethernet, PROFINET, PUR, halogen-free, shielded, 2 m | YM2D24-020PN1MRJA4 | 2106182 |

SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is “Sensor Intelligence.”

WORLDWIDE PRESENCE:

Contacts and other locations –www.sick.com